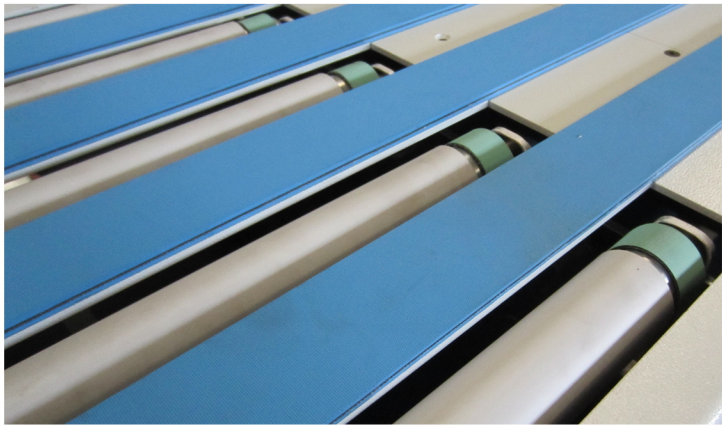# PARCEL SORTATION
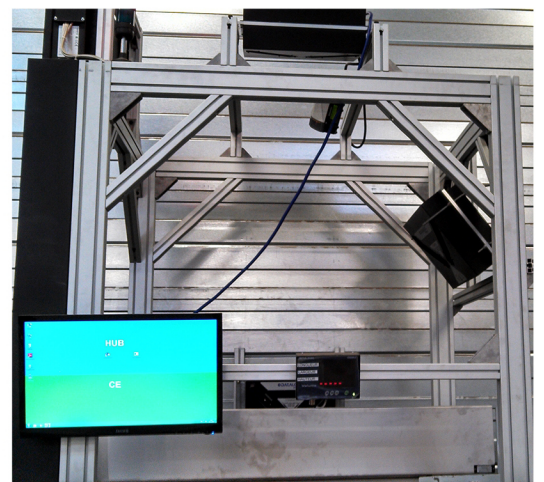# 'SPEED'

Transport and expulsion device

Parcels transport takes place by belts
Parcels expulsion take place by gummed rollers
with lifting by pneumatic device and
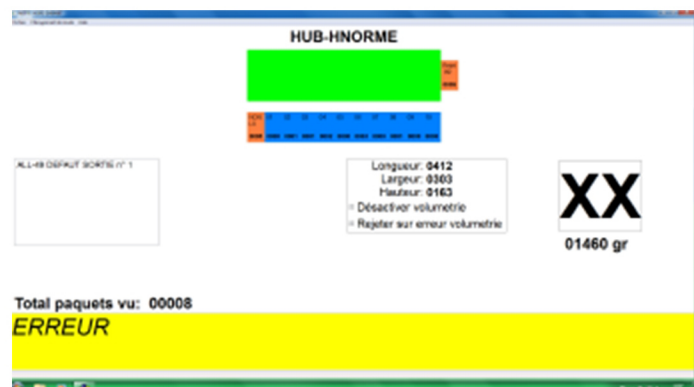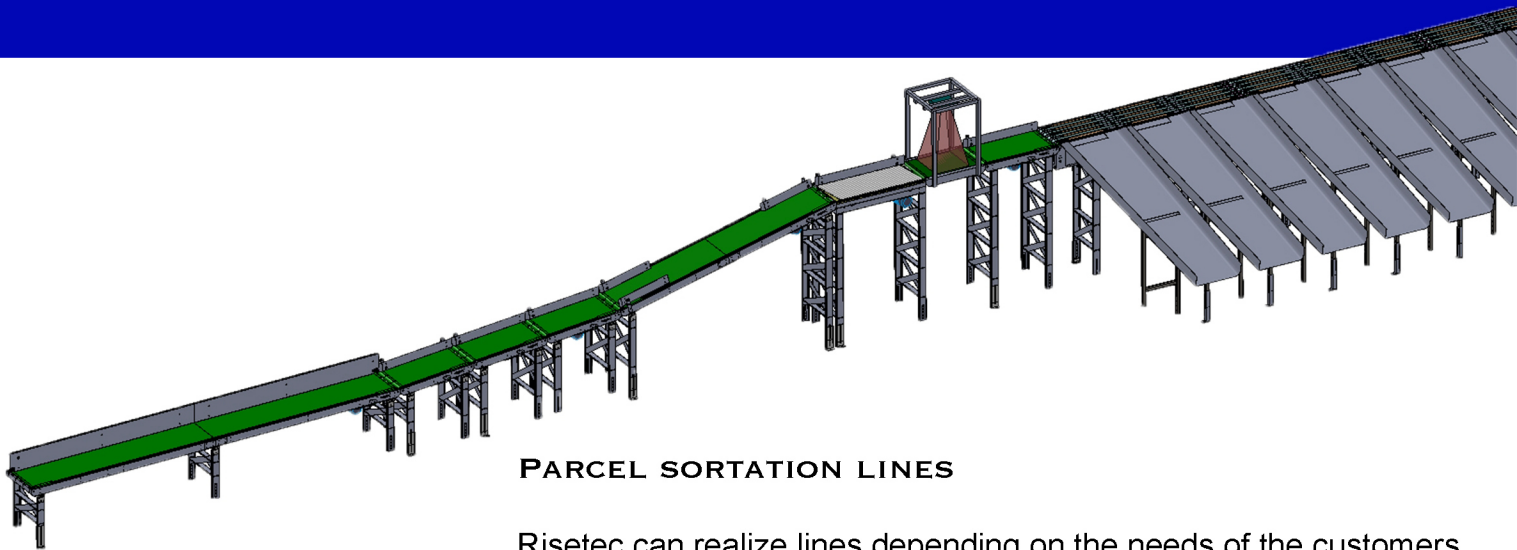rotation on right or left by step motors

Detection and weighing

Detection of parcels by code recognition and volumetric detection
lower conveyor belt with balance

Computer data management

All data are managed by a personal computer
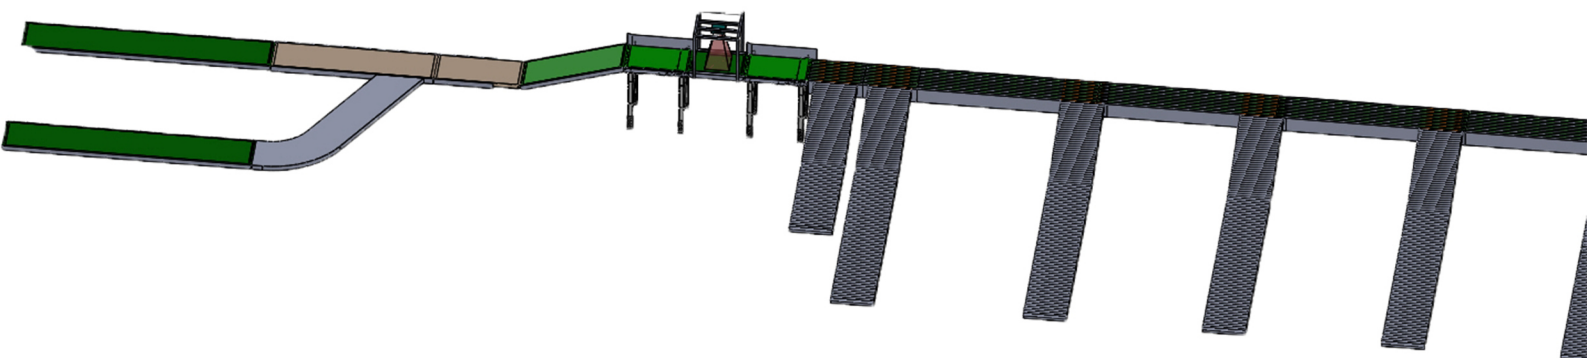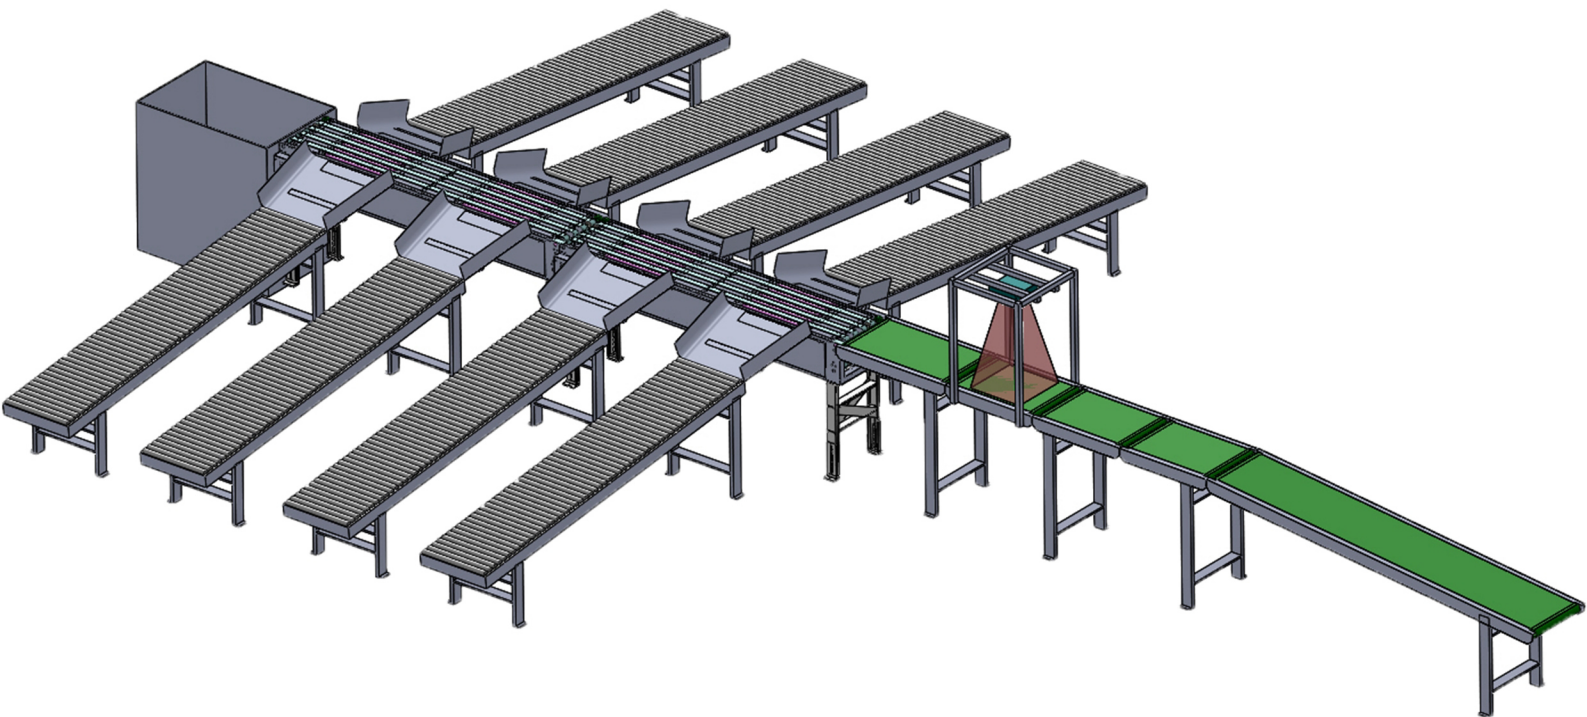with customer destination management
Scanner can reconize all type of codes

Parcel sortation lines

Risetec can realize lines depending on the needs of the customers
Groups are composed of two or three expulsion devices
and the expulsion can be on the right, left or both sides
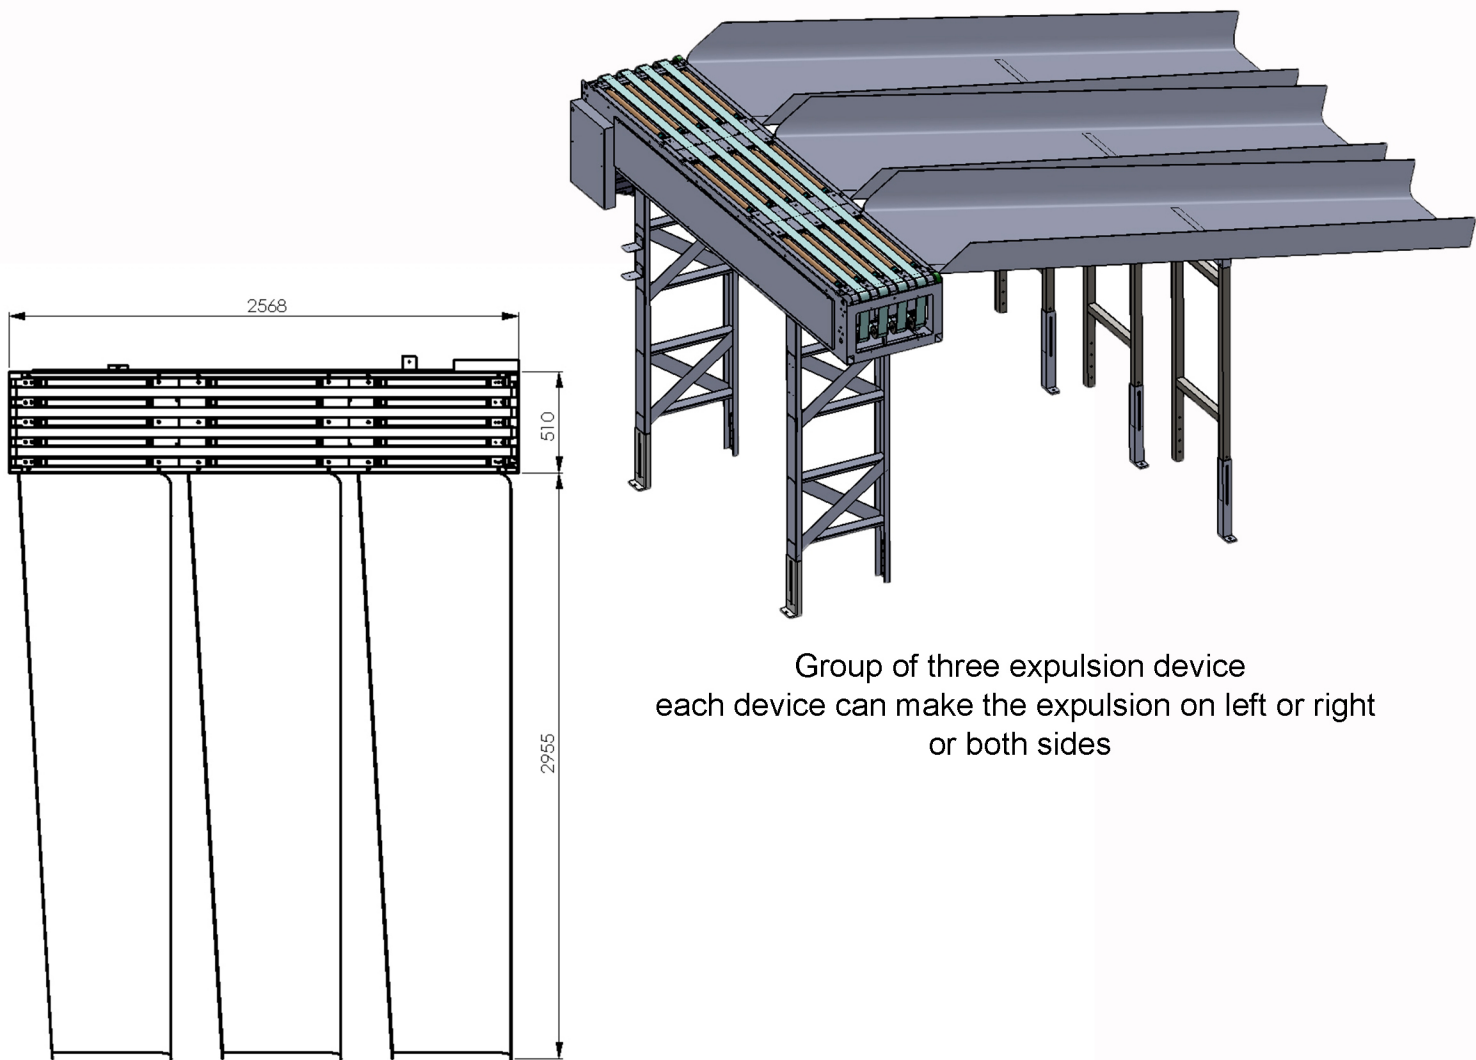
Parcels dimension (LxHxW):

Min format: 100 x 150 x 5 mm   -   50 g
Max format: 400 x 500 x 300 mm - 20 Kg

Capacity of sortation: up to 6000 parcels / h

Reading and data treatment: by barcode

Group of three expulsion device
each device can make the expulsion on left or right
or both sides